


Specification of LED modules

Product : P3(2020)-64x64pixel-192x192mm-32S-indoor

PN : **LED-P3-4R4C-32S**

(1) Picture

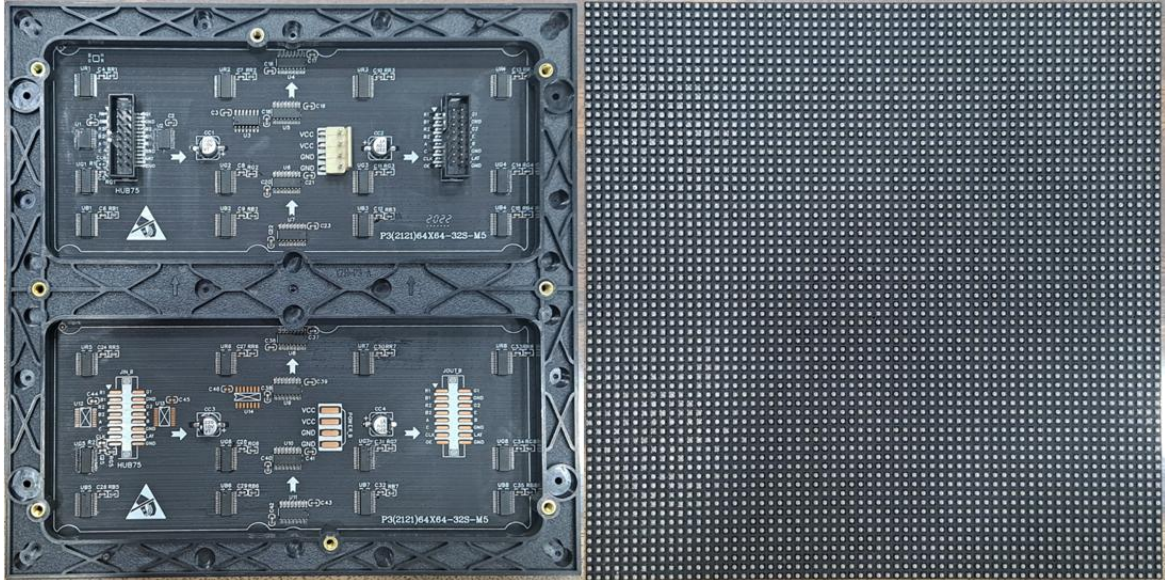


(2) LED SPEC.

No.	Item	Description
1	LED spec.	3In-1 SMD2020 LED
2	LED Pitch	3mm


(3) MODULE SPEC.

Size(Height x Width x Depth)	192 x 192 x 14.2mm
Resolution (H x W)	64 x 64 dots
Density (dots/m ²)	111,111 dots/m ²
Weight (Kg)	0.213 kg
Brightness	900 cd/m ²
Connector type	HUB75, 16pin
Driving method	1/32 Scan
View angle	Horizontal: ≥140 degree , Vertical: ≥140 degree
Best view distance	3 ~ 11M
Color	R,G,B 4096Gray
Display color	4096*4096*4096
Life span	>8000 hours
Voltage	DC5V
Power consumption (Max.)	≤ 29 W/pc
Average power	≤ 16 W/pc (when displaying text only)
Power per 1m ² (Max.)	787 W/m ²
Average power per 1m ²	393 W/m ² (when displaying text only)
Working temperature	-20°C ~ 60°C
Working humidity	10% ~ 90%RH

(4) Pin map of the data connector

Pin Map (J1)	Pin No.	Pin Name	Pin No.	Pin Name
	1	RD1	2	GD1
	3	BD1	4	GND
	5	RD2	6	GD2
	7	BD2	8	GND
	9	A	10	B
	11	C	12	P-ON-OUT,
	13	CLK	14	LATCH
	15	OE	16	GND

(5) Drawing of the frame

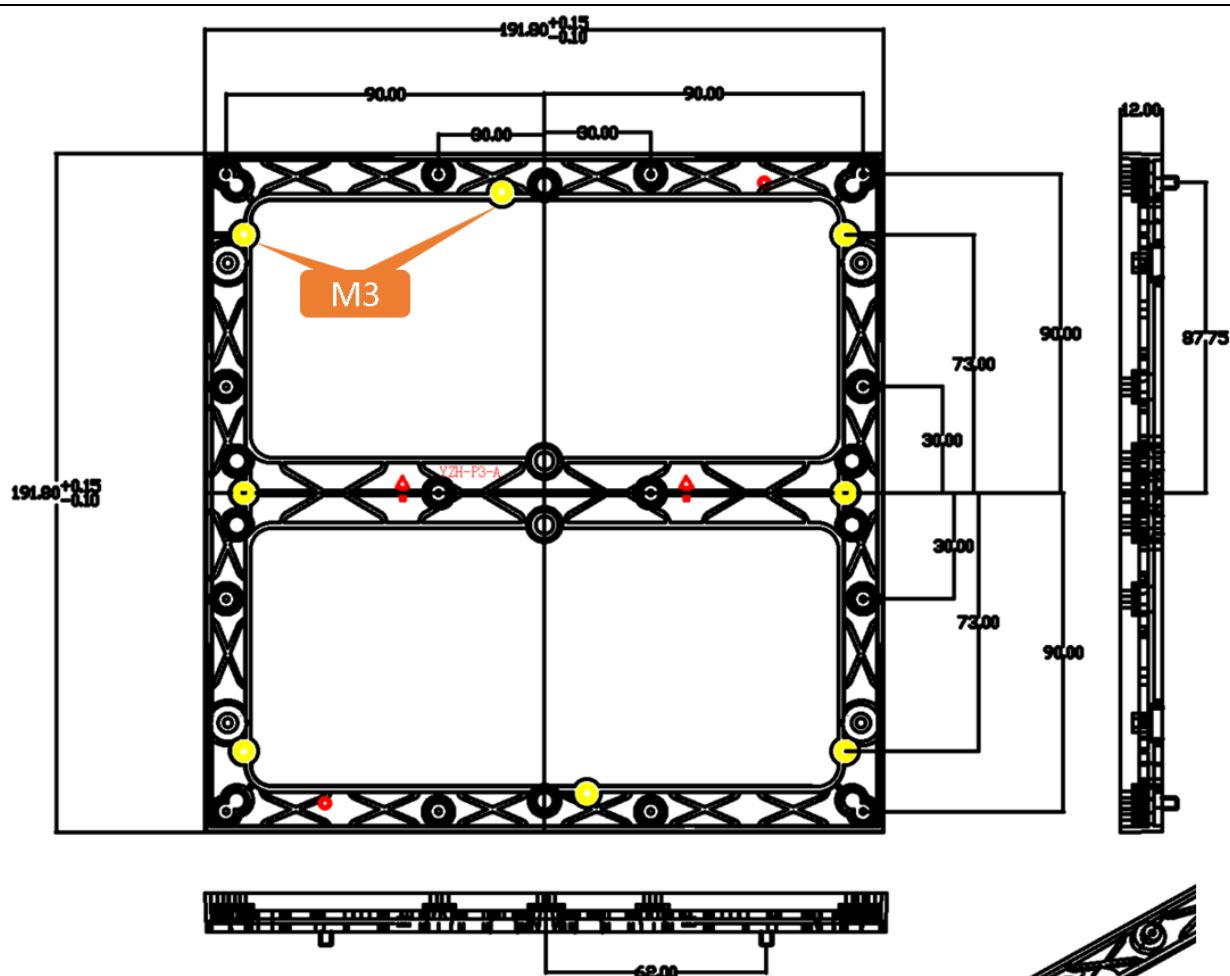

Fixing screw : M3 - 8pcs